

ProtectorGlaze Peelable Protection

Description


The peelable coating solution formulated for use on glass, PPC aluminium, PVCu, and most non-porous painted timber surfaces that require temporary protection from other building trades.

Protection In 3 Easy Steps

Apply by roller. The coating is clear when dry allowing diffused light into the building.



Simply peel to remove at the end of the project revealing clean glass.

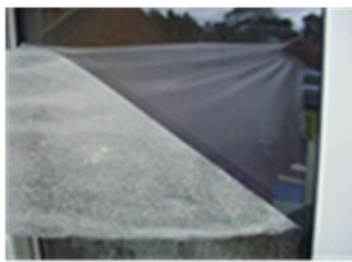

No bulk and environmentally disposed.



Financial Advantages

- ✓ Less labour time required to apply
- ✓ Glass can remain dusty when applying our product, unlike adhesive film that will require the glass to be cleaned first
- ✓ No waste factor with material as opposed to film that requires cutting and shaping
- ✓ Leaves no residue that requires cleaning away
- ✓ Reduces the time needed for final clean
- ✓ ProtectorGlaze does not fall off and need re-applying on site

Practical Advantages

- ✓ UV stable for up to 6 months
- ✓ Leaves a clear dry film, optimising visual space and allowing light to penetrate
- ✓ Product longevity at correct thickness (6 months externally and 24 months internally)
- ✓ Non-hazardous, water resistant when dry and water cleanable when wet
- ✓ Non-flammable, resistant to Hot Works 'flecks' and welding splatter associated with curtain walling fabrication and installation – certified to BS 476: Part 7
- ✓ Less waste volume, 1sqm of dry film creates just 60mm diameter ball of waste

ProtectorGlaze Application Guidance

Application	Exposure Limit
Glass/Glazing	24 Months Internal 6 Months External (May Require Water Resistant Topcoat)
External Moulded Doors	24 Months Internal 6 Months External (May Require Water Resistant Topcoat)
Acrylic Sanitaryware	24 Months Internal
Ceramic Sanitaryware	24 Months Internal
MFC/Marble Work Surfaces	24 Months Internal
Concrete Columns	24 Months Internal 6 Months External
Aluminium/UPVC/Concrete Window Cills	Not Recommended For Use

It is recommended that all users always conduct a patch-test in order to establish compatibility with particular surfaces

Additional Products Available:

ProtectorGlaze Topcoat & ProtectorGlaze StoneProtect Primer

ProtectorGlaze Topcoat

A water-based, water-resistant peelable acrylic coating solution formulated for use in conjunction with regular ProtectorGlaze product.

Additional Advantages Of ProtectorGlaze Topcoat

- ✓ Can be applied by roller onto touch-dry base coat or by hand sprayer onto wet base coat, depending upon time constraints
- ✓ Applied on top of regular ProtectorGlaze product in specific areas where glazing is exposed to heavy rainfall/surface water contact
- ✓ Leaves base coat with a water-resistant surface
- ✓ MUST ONLY BE USED ON TOP OF PROTECTORGLAZE PRODUCT

ProtectorGlaze StoneProtect Primer

A non-yellowing, acrylic basecoat seal that penetrates and seals brick, limestone, sandstone, concrete, terracotta and other porous surfaces.

StoneProtect provides an invisible protective barrier against oil and water on porous stone surfaces.

Additional Advantages Of ProtectorGlaze StoneProtect

- ✓ Does not change the appearance of natural stone
- ✓ Does not discolour even the lightest coloured surface
- ✓ Dries and cures in 30 minutes
- ✓ Coverage rate 40m²/litre
- ✓ MUST ONLY BE USED ON TOP OF PROTECTORGLAZE PRODUCT

Please contact one of our offices for further information on this product and for any other queries relating to the Ockwells range of temporary protection materials.

The company reserves the right to improve products, and any change in specification will result in a re-issue of the information sheet. Please check that you have the latest issue of the information sheet.

Issue 2

These properties are the Manufacturers' typical values based on the average of several tests. As the installation and handling of this product is beyond our control the user must ensure that the product is suitable for the application. Ockwells cannot accept responsibility for any loss or damage that may occur either directly or indirectly using this product. Ockwells also holds the right to change specification data without prior notice

NEWBURY

01635 876336
sales@ockwells.co.uk

WARRINGTON

01925 820003
sales.warrington@ockwells.co.uk

GLASGOW

0141 427 3366
sales.glasgow@ockwells.co.uk

EAST LONDON

020 7473 8770
sales.eastlondon@ockwells.co.uk